

FPS08-15K Data Sheet

Abstract

The FPS08-15K is a dual-channel, high-insulation DC/DC power supply for 3300V, 4500V and 6500V IGBT gate driver power sources. The output voltage is +15V and -10V, and the maximum power is 8W. The FPS08-15K can provide power supply for the high-voltage gate driver core HV1027P, or other gate drivers with the same voltage.

Highlights:

- Primary and secondary side isolation 15KV_{RMS}
- Primary and secondary side creepage distance 60mm
- Output power 8W
- 14~25V wide range of input voltage
- Output power supply overload protection
- Primary and secondary side coupling capacitance 5pF


Applications:

- Rail
- Grid
- Motor drives



Fig.1 FPS08-15K

Mechanical Dimensions

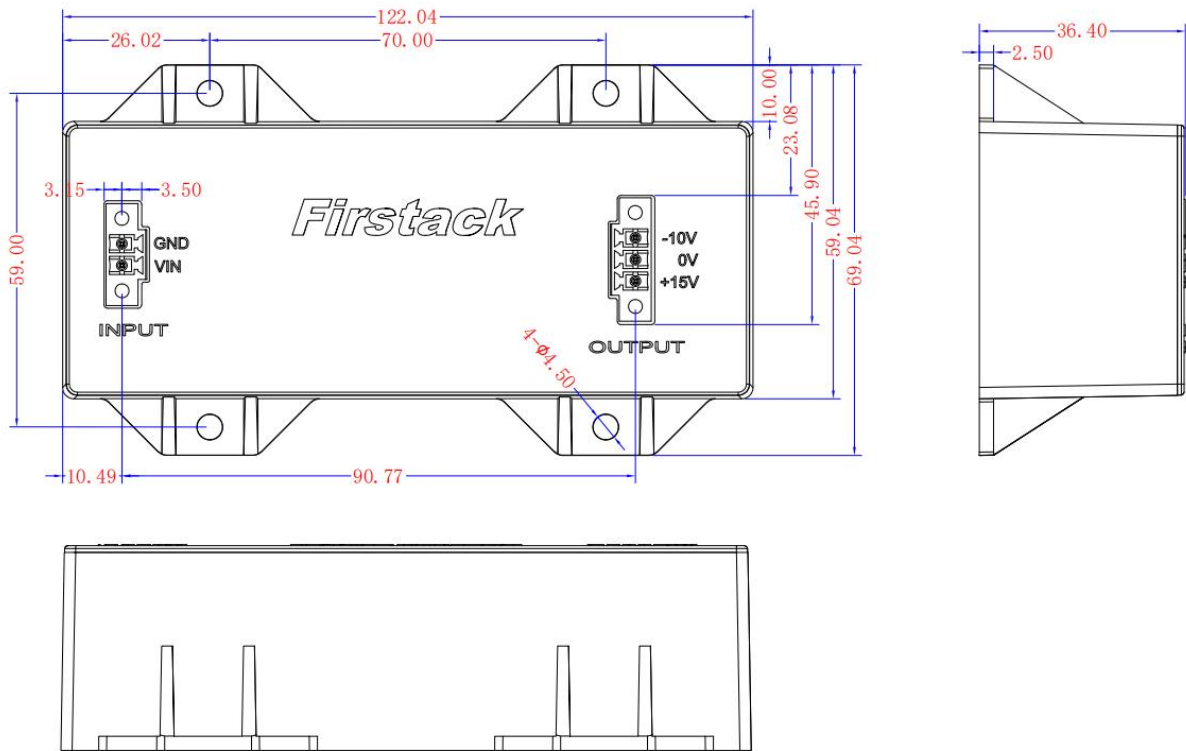

Unit: mm

Fig.2 Mechanical dimensions

- Note: 1. The thickness tolerance of the board is $\pm 10\%$;
 2. Other dimensional tolerances refer to GB/T1804-m.

Pin Functional Description

J1 is the DC input terminal

J1-1=GND J1-2=VIN

J2 is the DC output terminal

J2-1=-9.5V J2-2=GND J2-3=+15V



Fig.3 I/O terminal diagram

Connector Manufacturer and Part Number

Number	Ref	Manufacturer	Part Number	Recommended Matching Terminal
1	J1	WE	691323300002	691364300002
2	J2	WE	691325310003	691364300003

Technical Parameters

Absolute Maximum Ratings

Parameter	Ref	Min	Typ	Max	Unit	Note
Input voltage		0		27	V	Input VCC to input GND
Input current				1	A	13V input
Power supply output power				8	W	$T_A \leq 65^\circ\text{C}$
Dielectric withstand voltage				15	kV _{RMS}	Primary to secondary side
Operating temperature	T_{op}	-40		+85	$^\circ\text{C}$	As temperature derating curve
Storage temperature	T_{stg}	-40		+85	$^\circ\text{C}$	

Electrical Characteristics

Output Characteristics	Min	Typ	Max	Unit	Note
Output voltage +15V	14.6	15.2	16	V	Without load, Note 1
		15.2		V	Load=0.35A, Note 1
Output voltage -10V	9.2	-9.6	-10.4	V	Without load, Note 1
		-9.6		V	Load=0.25A, Note 1

Input Characteristics	Min	Typ	Max	Unit	Note
Input voltage	14	15/24	25	V	Input VCC to input GND
		0.08		A	Without load (15V input)
Supply current		0.26		A	Load 3W (15V input)
		0.18		A	Load 3W (24V input)
Turn-on threshold		10.8		V	Note 2

Electrical Isolation	Min	Typ	Max	Unit	Note
Dielectric test voltage			15	kV _{RMS}	Primary to secondary side, AC/1min
Withstand voltage			6.5	kV _{peak}	Primary to secondary side
Creepage distance	60			mm	Primary to secondary side, Note 3
Clearance distance	50			mm	Primary VS secondary side, Note 4
Coupling Capacitance			5	pF	Primary to secondary side

Note:

1. Output voltage range may deviate with and without load.
2. When the input voltage is over 10.8V, the power supply starts to work.
3. The shortest distance between input and output along the insulating surface.
4. The shortest distance between input and output.

Characteristic Curve

1. Output U-I curve

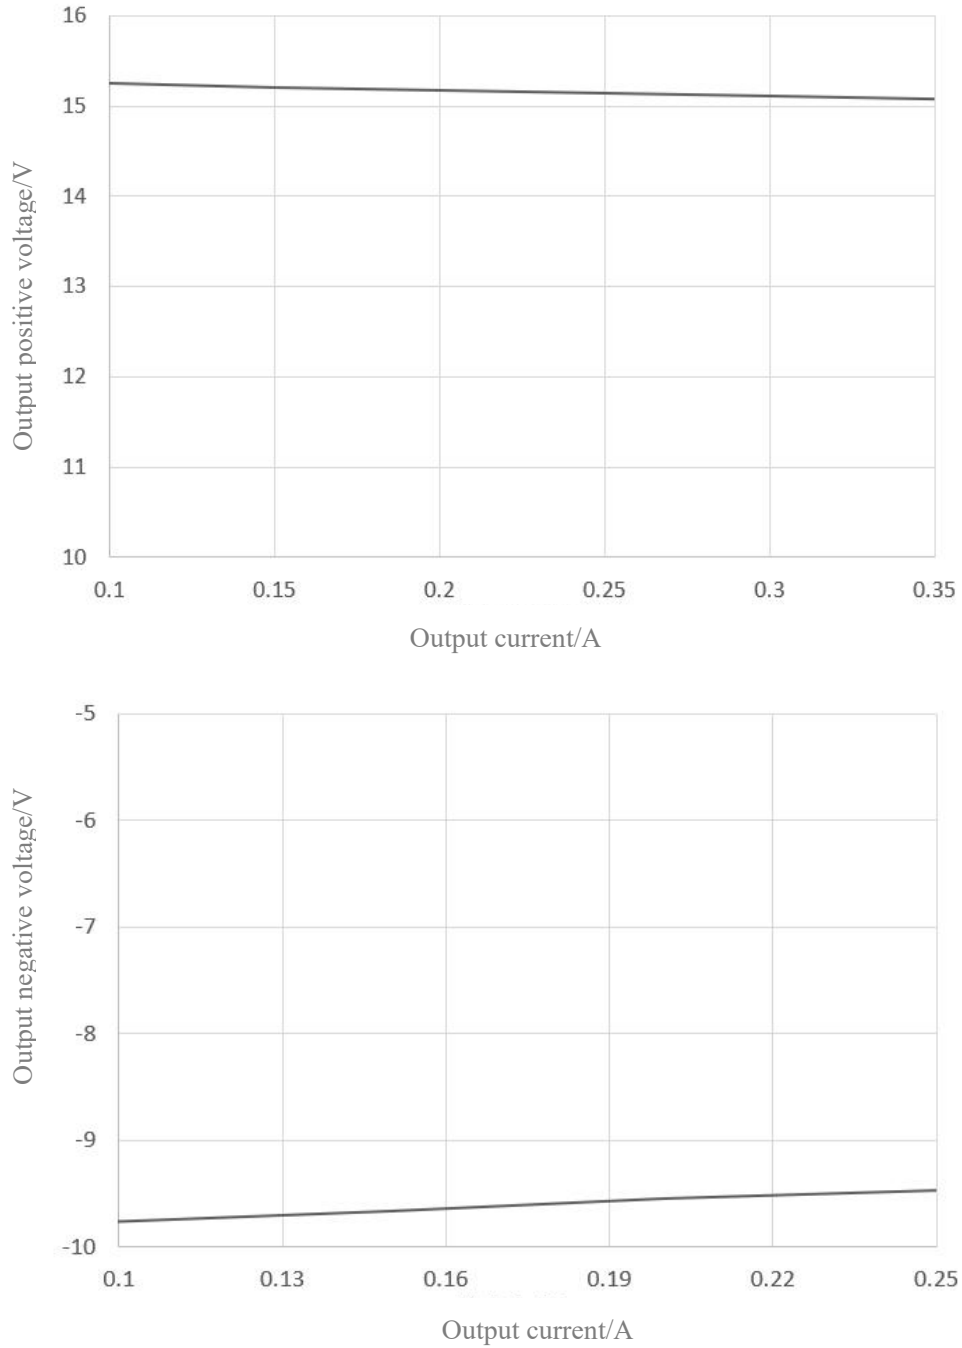


Fig.4 Output voltage VS output current

2. Derating curve

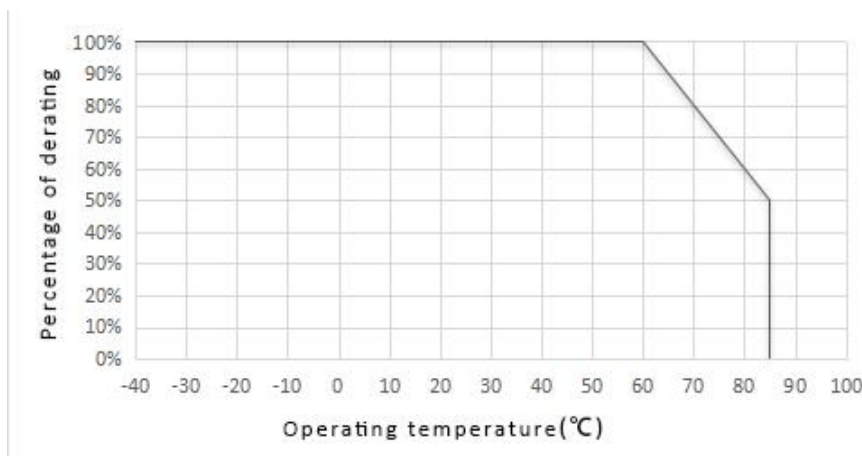


Fig.5 Derating curve

Technical Support

Firstack's professional team will provide you with business consultation, technical support, product selection, price, lead time and other related information, and guarantee to answer your questions within 48 hours.

Legal Disclaimer

The instruction manual provides a detailed description of the product but does not commit to providing specific parameters regarding the delivery, performance, or applicability of the product. This document does not offer any express or implied warranties or guarantees.

Firstack reserves the right to modify technical data and product specifications at any time without prior notice. The general delivery terms and conditions of Firstack apply.

Contact Information

Tel: +86-571 8817 2737

Fax: +86-571 8817 3973

Website: www.firstack.com

Email: fsales@firstack.com

Address: 4-5/F, Building/5, Xizi Wisdom Industrial Park, No.1279 Tongxie Road, Hangzhou, China